



6 CUBE ORGANIZER ASSEMBLY

PLEASE READ FIRST: This product is designed for quick & easy assembly. The included connectors will press together and expand as two panels meet, this ensures a permanent connection. Carefully align all connectors before securing the shelves with a rubber mallet. Do not press the connectors together early.



Scan the QR code or visit us at DakotaPanel.com/Cube for assembly videos, instructions and more.



TOOLS REQUIRED

- Rubber Mallet / Dead Blow Hammer
- Screw Driver / Drill
- Hammer




WARNING: All units must be secured to the wall using the hardware provided. Failure to do so may create an unsafe tipping hazard that could lead to injury or damage to personal belongings.


COMPONENTS: Prior to assembly, please verify all parts listed are present. For assembly or other product questions, please contact us at dpguestservice@dakotapanel.com.

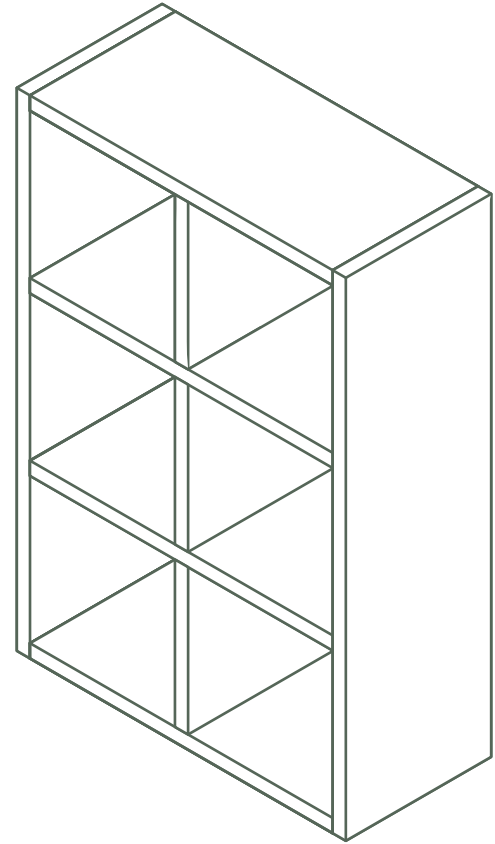


Top/Bottom Panels (A)
Qty: 2

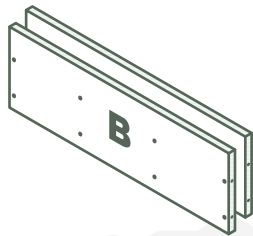


Side Panels (B)
Qty: 2



Fixed Shelves (C)
Qty: 2



Vertical Divider (D)
Qty: 1



Connectors
Qty: 20



Back Panels
Qty: 3



Nails
Qty: 24



Anti-Tip Bracket
Qty: 2




2" Screw
Qty: 1



Zip Tie
Qty: 1




5/8" Screw
Qty: 1

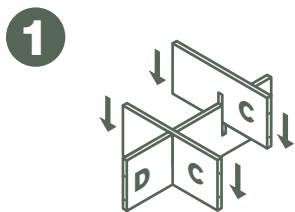


1 Interlock Fixed Shelves (C) with Vertical Divider (D)

Together, these will create a snug connection, the edges should be flush when properly connected.

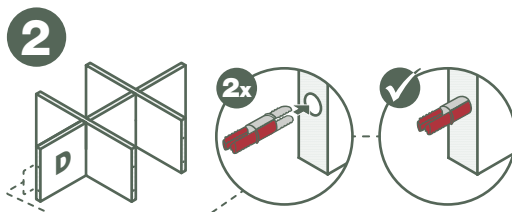


2 Insert connectors (2) into Vertical Divider (D)

Do not force them in, insert up to the raised line on the connector.

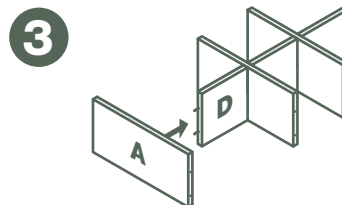


3 Align holes of Top/Bottom Panel (A) with connectors in Vertical Divider (D)

Double check each connector is in the holes of both panels before proceeding.

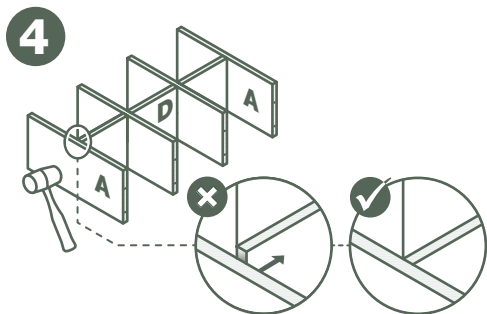


4 Using a rubber mallet, hit the panel directly atop where the connectors are lined up.

Some force is required, the gap should be fully closed when properly connected.

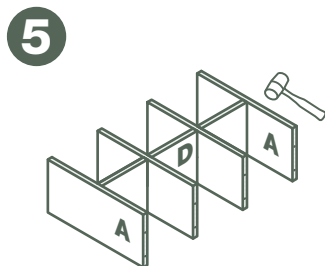


5 Repeat on the opposite side with the second Top/Bottom Panel (A)

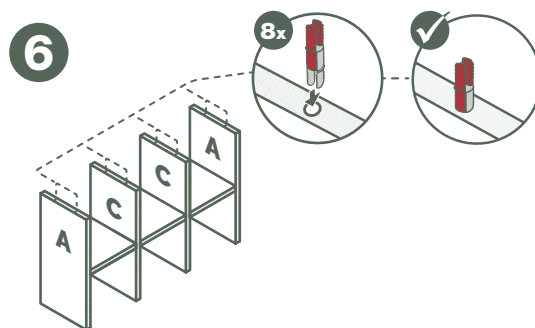

6 Flip it onto the side and place connectors (8) into holes of Top/Bottom Panels (A) and Fixed Shelves (C)


They should rest loosely in the holes.

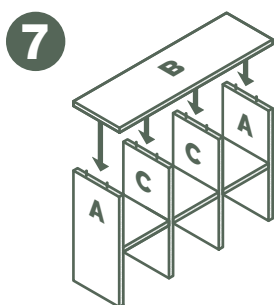

Tip: Position one set of connectors in the holes at a time


7 Align holes of Side Panel (B) with the inserted connectors in Top/Bottom Panels (A) and Fixed Shelves (C)

This will require extra attention to ensure that the connectors are properly lined up in the holes of each panel. Do not press down on panel B.

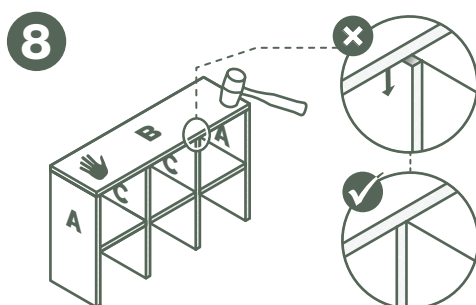


8 Using your hand to hold down one side, hit the opposite side with a mallet directly atop where the connectors are lined up.

Work your way from one side to the other continuing to tap each connector into place. There should be no gaps when properly connected.

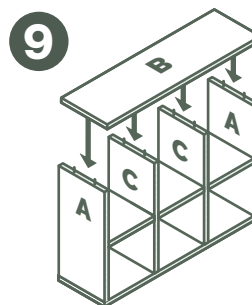


9 Flip the organizer over and repeat steps 6-8 on the opposite side.

Insert connectors, ensure all connectors are positioned properly, hold down one side, and hit the other side with a rubber mallet.

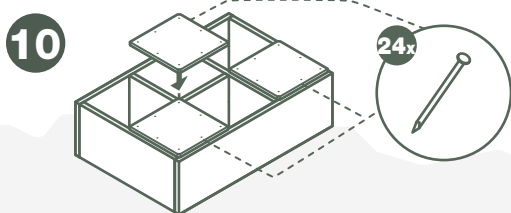

Use a hammer and the included nails to fasten Back Panels (3) to the organizer. Use 8 nails per backer.

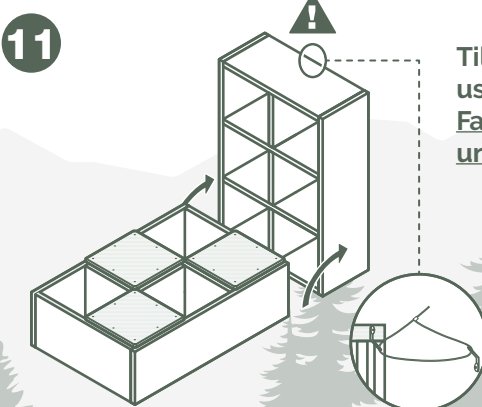

Tilt organizer upright and secure to wall using the included anti-tip hardware. **Failure to secure to wall may create an unsafe tipping hazard.**